




## Camera IP Bullet IP67, risoluzione 2Mp

Camera IP Bullet IP67, risoluzione 2Mp con 25Fps, con sensore CMOS progressivo 1/2.7", H.265/H.264, ICR meccanico, ottica 3.6mm, luminosità 0.08Lux f2.0 (0 Lux con IR on), led IR portata fino a 30mt, porta LAN 10/100Mbps, privacy mask 4 aree, 3D, WDR, alimentazione 12Vdc/PoE <5W, in dotazione staffa di fissaggio, compatibile ONVIF

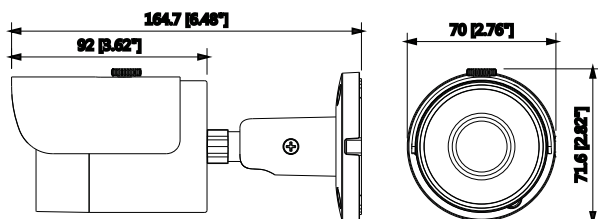


### ACCESSORI (OPTIONAL)



ACM260



ACM214



ACM202



ACM262



ACM203

## CARATTERISTICHE TECNICHE

<b>Camera</b>	<b>NBF201L</b>				
Image Sensor	1/2.7" 2Megapixel progressive CMOS				
Effective Pixels	1920(H) x1080(V)				
RAM/ROM	256MB/32MB				
Scanning System	Progressive				
Electronic Shutter Speed	Auto/Manual, 1/3~1/100000s				
Minimum Illumination	0.08Lux/F2.0 (Color, 1/3s, 30IRE)				
	0.3Lux/F2.0 (Color, 1/30s, 30IRE)				
	0Lux/F2.0 (IR on)				
S/N Ratio	More than 50dB				
IR Distance	Distance up to 30m(98ft)				
IR On/Off Control	Auto/ Manual				
IR LEDs	18				
<b>Lens</b>					
Lens Type	Fixed				
Mount Type	Board-in				
Focal Length	2.8 mm (3.6 mm optional)				
Max. Aperture	F2.0/F2.0				
Angle of View	H:104°/92°;V:55°/50°				
Focus Control	Fixed				
Close Focus Distance	0.6m(0.9m)				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8 mm	40(131ft)	16(52ft)	8(26ft)	4(13ft)
	3.6 mm	53(174ft)	21(69ft)	11(36ft)	5(16ft)
<b>PTZ</b>					
Pan/Tilt Range	Pan:0° ~360° ;Tilt:0° ~90° ;Rotation:0° ~360°				
<b>Intelligence</b>					
Event Trigger	Motion detection, Video tampering, Scene changing, Network disconnection, IP address conflict, Illegal access, Storage anomaly				
IVS	Tripwire, Intrusion				
<b>Video</b>					
Compression	H.265/H.264H/MJPEG(Sub Stream)				
Smart Codec	Support H.265+/H.264+				
Streaming Capability	2 Streams				
Resolution	1080P(1920×1080)/1.3M(1280×960)/720P(1280×720)/D1(704×576/704×480)/ VGA(640×480)/CIF(352×288/352×240)				
Frame Rate	Main Stream: 1080P(1 ~ 25/30fps) Sub Stream: D1(1 ~ 25/30fps)				
Bit Rate Control	CBR/VBR				
Bit Rate	H.265: 12K ~ 6400Kbps H.264: 32K ~ 10240Kbps				
Day/Night	Auto(ICR) / Color / B/W				
BLC Mode	BLC / HLC / DWDR				
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual				
Gain Control	Auto/Manual				
Noise Reduction	3D DNR				
Motion Detection	Off / On (4 Zone, Rectangle)				
Region of Interest	Off / On (4 Zone)				
Electronic Image	Support				
Smart IR	Support				
Digital Zoom	16x				
Flip	0°/90°/180°/270°				
Mirror	Off / On				
Privacy Masking	Off / On (4 Area, Rectangle)				
<b>Audio</b>					
Compression	N/A				
<b>Network</b>					
Ethernet	RJ-45 (10/100Base-T)				
Protocol	HTTP;HTTPS;TCP;ARP;RTSP;RTP;RTCP;UDP;SMTP;FTP;DHCP;DNS;DDNS;PPPoE;IPv4/v6;QoS;UPnP;NTP;Bonjour;IEEE 802.1x;Multicast;ICMP;GMP;TLS				
Interoperability	ONVIF Profile S&G, API				
Streaming Method	Unicast / Multicast				
Max. User Access	10 Users / 20 Users				
Edge Storage	NAS				
	Local PC for instant recording				
Web Viewer	IE, Chrome, Firefox, Safari				
Management Software	Smart PSS, DSS, DMSS				
Smart Phone	IOS, Android				
<b>Interface</b>					
Video Interface	N/A				
Audio Interface	N/A				
RS485	N/A				
Alarm	N/A				
<b>Electrical</b>					
Power Supply	DC12V, PoE (802.3af)(Class 0)				
Power Consumption	<5.5W				
<b>Environmental</b>					
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Ingress Protection	IP67				
Vandal Resistance	N/A				
<b>Construction</b>					
Casing	Metal+Plastic				
Dimensions	Φ70mm×164.7mm(2.76"×6.49")				
Net Weight	0.38Kg(0.84lb)				
Gross Weight	0.44Kg(0.97lb)				