




Camera IP Bullet 2Mp Starlight ottica motorizzata 2.7~13,5mm

Camera IP Bullet IP67 STARLIGHT, risoluzione 2Mp con 25Fps, con sensore CMOS progressivo 1/2,8", H265+/H264, ICR meccanico, ottica motorizzata 2.7~13,5mm, luminosità 0.006Lux /F1.4 (0 Lux con IR on), led IR portata fino a 60mt, 1 slot per MicroSD-Card (max 128Gb), porta LAN 10/100, privacy mask 4 aree, 3D, WDR, alimentazione 12Vdc o PoE <14W, in dotazione staffa di fissaggio, compatibile ONVIF

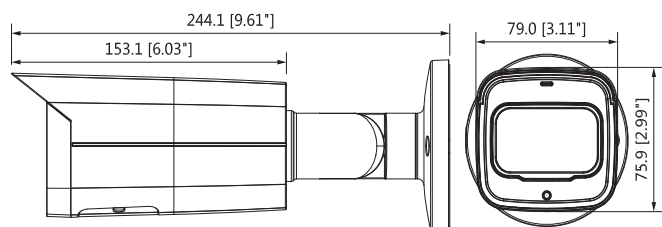

ACCESSORI (OPTIONAL)




ACM260



ACM212



ACM262



ACM202

CARATTERISTICHE TECNICHE

Camera	NBV204SM				
Image Sensor	1/2.8" 2Megapixel progressive CMOS				
Effective Pixels	1920(H) x1080(V)				
RAM/ROM	256MB/32MB				
Scanning System	Progressive				
Electronic Shutter Speed	Auto/Manual, 1/3~1/10000s				
Minimum Illumination	0.006Lux/F1.4 (Color, 1/3s,30IRE) 0.05Lux/F1.4 (Color, 1/30s,30IRE) 0Lux/F1.4(IR on)				
S/N Ratio	More than50dB				
IR Distance	Distance up to 60m(197ft)				
IR On/Off Control	Auto/ Manual				
IR LEDs	4				
Lens					
Lens Type	Motorized (-ZS), Manual (-VFS)				
Mount Type	Board-in				
Focal Length	2.7mm~13.5mm				
Max. Aperture	F1.4				
Angle of View	H:106°~29°, V:57°~17°				
Focus Control	Motorized				
Close Focus Distance	0.3m				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	46m(150ft)	18m(59ft)	9m(30ft)	5m(16ft)
	T	153m(502ft)	61m(200ft)	31m(102ft)	15m(49ft)
PTZ					
Pan/Tilt Range	Pan:0° ~360° ;Tilt:0° ~90° ;Rotation:0° ~360°				
Intelligence					
Event Trigger	Motion detection, Video tampering , Scene changing , Network disconnection , IP address conflict, Illegal Access,Storage anomaly				
IVS	Tripwire, Intrusion				
Video					
Compression	H.265/H.264H/MJPEG(Sub Stream)				
Smart Codec	Support H.265+/H.264+				
Streaming Capability	2 Streams				
Resolution	1080P(1920×1080)/1.3M(1280×960)/ 720P(1280×720)/D1(704×576/704×480)/ VGA(640×480)/CIF(352×288/352×240)				
Frame Rate	Main Stream: 1080P (1 ~ 25/30fps) Sub Stream: D1(1 ~ 25/30fps)				
Bit Rate Control	CBR/VBR				
Bit Rate	H.265: 12K ~ 6400Kbps H.264: 32K ~ 10240Kbps				
Day/Night	Auto(ICR) / Color / B/W				
BLC Mode	BLC / HLC / WDR(120dB)				
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual				
Gain Control	Auto/Manual				
Noise Reduction	3D DNR				
Motion Detection	Off / On (4 Zone, Rectangle)				
Region of Interest	Off / On (4 Zone)				
Electronic Image Stabilization(EIS)	N/A				
Smart IR	Support				
Digital Zoom	16x				
Flip	0°/90°/180°/270°				
Mirror	Off / On				
Privacy Masking	Off / On (4 Area, Rectangle)				
Audio					
Compression	N/A				
Network					
Ethernet	RJ-45 (10/100Base-T)				
Protocol	HTTP;HTTPS;TCP;ARP;RTSP;RTP;RTCP;UDP;SMTP; FTP;DHCP;DNS;DDNS;PPPoE;IPV4/v6;QoS;UPnP; NTP;Bonjour;IEEE 802.1x;Multicast;IGMP; TLS				
Interoperability	ONVIF Profile S&G, API				
Streaming Method	Unicast / Multicast				
Max. User Access	10 Users / 20 Users				
Edge Storage	NAS Local PC for instant recording Micro SD Card 128GB				
Web Viewer	IE, Chrome, Firefox, Safari				
Management Software	Smart PSS, DSS, DMSS				
Smart Phone	IOS, Android				
Interface					
Video Interface	N/A				
Audio Interface	N/A				
RS485	N/A				
Alarm	N/A				
Electrical					
Power Supply	DC12V,PoE+ (IEEE 802.3at)(Class 4)				
Power Consumption	<14W				
Environmental					
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Ingress Protection	IP67				
Vandal Resistance	N/A				
Construction					
Casing	Metal				
Dimensions	244.1mm×79mm×75.9mm (9.61"×3.11"×2.99")				
Net Weight	0.815kg (1.80lb)				
Gross Weight	1.08kg (2.38lb)				