NCF200PH

PIXVIDEO

Telecamera Pinhole IP da 2Mp STARLIGHT Ottica 2.8mm

Telecamera Pinhole IP da interno STARLIGHT con sensore CMOS progressivo 1/2.7" da 2Mp, risoluzione 1.080p con 25Fps, H.265/H.264, ottica fissa pinhole da 2.8mm conico, luminosità 0.007Lux ƒ2.4, porta LAN 10/100, privacy mask 4 aree, 3D, WDR, alimentazione 12Vdc <1.5W, 1 ingresso e 1 uscita audio, staffa di fissaggio in dotazione, compatibile ONVIF

PIXVIDEO

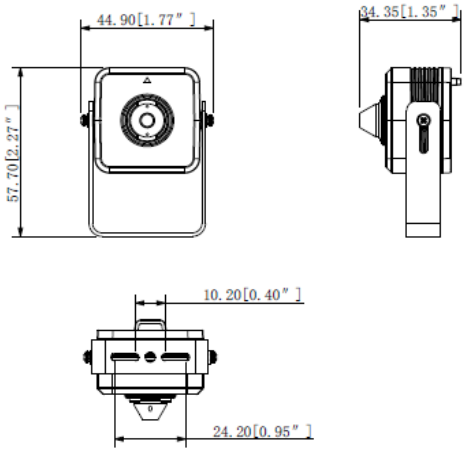

CARATTERISTICHE TECNICHE

Camera	**NCF200PH**				
Image Sensor	1/2.7" 2Megapixel progresive CMOS				
Effective Pixels	1920H)x1080(V)				
RAM/ROM	256MB/128MB				
Scanning System	Progressive				
Electronic Shutter Speed	Auto/Manual, 1/3~1/100000s				
Minimum Illumination	0.007Lux/F2.4(Color,1/3s,30IRE) 0.04Lux/F2.4(Color,1/30s,30IRE) 0.004Lux/F2.4(B/W,1/3s,30IRE) 0.02Lux/F2.4(B/W,1/30s,30IRE)				
S/N Ratio	More than 50dB				
IR Distance	N/A				
IR On/Off Control	N/A				
IR LEDs	N/A				
Lens					
Lens Type	Fixed				
Mount Type	Board-in				
Focal Length	2.8mm				
Max. Aperture	F2.4				
Angle of View	H:105°, V:60°				
Focus Control	Fixed				
Close Focus Distance	N/A				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8 mm	63(207ft)	25(82ft)	13(43ft)	6(20ft)
Pan/Tilt/Rotation					
Pan/Tilt/Rotation Range	N/A				
Intelligence					
Event Trigger	Motion detection, Video tampering, Scene changing, Network disconnection, Ip address conflict, Illegal access, Storage anomaly				
IVS	Tripwire, Intrusion, Object Abandoned/Missing				
Advanced Intelligent Functions	Face Detection				
Video					
Compression	H.265/H.264/H.264B/H.264H/MJPEG(Sub Stream)				
Smart Codec	Support H.265+/H.264+				
Streaming Capability	3 Streams				
Resolution	1080P(1920×1080)/960P(1280×960)/720P(1280×720)/D1(704×576/704×480)/VGA(640×480)/CIF (352×288/352×240)				
Frame Rate	Main Stream: 1080p (1 ~ 25/30fps) Sub Stream: D1(1 ~ 25/30fps) Third Stream: 1080P(1 ~ 14/9fps)				
Bit Rate Control	CBR/VBR				
Bit Rate	H.265: 12K ~ 6400Kbps H.264: 32K ~ 8192Kbps				
Day/Night	Auto(Electronic) / Color / B/W				
BLC Mode	BLC / HLC / WDR(120dB)				
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual				
Gain Control	Auto/Manual				
Noise Reduction	3D DNR				
Motion Detection	Off / On (4 Zone, Rectangle)				
Region of Interest	Off / On (4 Zone)				
Electronic Image Stabilization (EIS)	N/A				
Smart IR	N/A				
Digital Zoom	16x				
Flip	0°/90°/180°/270°				
Mirror	Off / On				
Privacy Masking	Off / On (4 Area, Rectangle)				
Audio					
Compression	G.711a/G.711Mu/AAC/ G.726				
Network					
Ethernet	RJ-45 (10/100Base-T)				
Protocol	HTTP;HTTPS;TCP;ARP;RTSP;RTP;RTCP;UDP;SMTP; FTP;DHCP;DNS;DDNS;PPPoE;IPV4/V6;QoS;UPnP; NTP;Bonjour;IEEE 802.1X;Multicast;ICMP;IGMP;TLS				
Interoperability	ONVIF Profile S, API				
Streaming Method	Unicast / Multicast				
Max. User Access	10 Users / 20 Users				
Edge Storage	NAS Local PC for instant recording				
Web Viewer	IE, Chrome, Firefox, Safari				
Management Software	Smart PSS, DSS, DMSS				
Smart Phone	IOS, Android				
Interface					
Video Interface	N/A				
Audio Interface	1/1 channel In/Out				
RS485	N/A				
Alarm	N/A				
Electrical					
Power Supply	DC12V				
Power Consumption	< 1.5W				
Environmental					
Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Stroage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH				
Ingress Protection	N/A				
Vandal Resistance	N/A				
Construction					
Casing	Metal				
Dimensions	44.9mm × 57.7mm×34.35mm (1.77" x 2.27"x 1.35")				
Net Weight	0.102Kg (0.225lb)				
Gross Weight	0.145Kg (0.319lb)				

Le immagini e le caratteristiche tecniche possono subire variazioni senza preavviso da parte del produttore

Rev. 190102