




WiFi Camera IP da 3Mp, ottica 2.8mm ANTIVANDALO IK10 - IP67

WiFi Camera IP Dome, antivandalo IK10, da esterno/interno IP67, con sensore CMOS progressivo 1/3", risoluzione massima 3Mp con 20Fps, ICR meccanico, ottica da 2.8mm, H264+/H264, luminosità 0,1 lux f 2.0 (0 Lux con IR on), led IR portata fino a 30mt, porta LAN 10/100 + Wifi 802.11b/g, 1 slot per MicroSD-Card per backup (max 128Gb), privacy mask 4 aree, 3D, WDR, alimentazione 12Vdc <5.5W, compatibile ONVIF

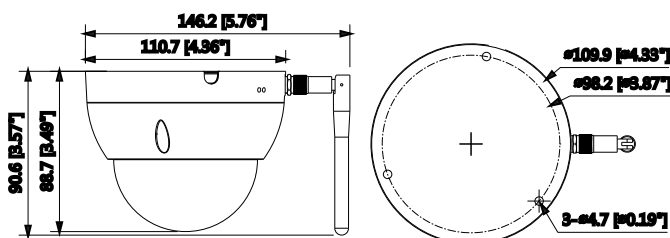

ACCESSORI (OPTIONAL)



ACM206




ACM253



ACM262



ACM203



ACM202

CARATTERISTICHE TECNICHE

Camera	NDF301W
Image Sensor	1/3" 3Megapixel progressive CMOS
Effective Pixels	2304(H)x1536(V)
RAM/ROM	256MB/16MB
Scanning System	Progressive
Minimum Illumination	0.1Lux/F2.0(Color), 0Lux/F2.0(IR on)
S/N Ratio	More than 50dB
IR Distance	Distance up to 30m(98ft)
IR On/Off Control	Auto/ Manual
IR LEDs	24
Lens	
Lens Type	Fixed
Mount Type	Board-in
Focal Length	2.8 mm (3.6 mm optional)
Max. Aperture	F2.0/F2.0
Angle of View	H:100°/77°, V:55°/42°
Focus Control	Fixed
Close Focus Distance	N/A
PTZ	
Pan/Tilt Range	Pan:0° ~355° ;Tilt:0° ~55° ;Rotation:0° ~355°
Video	
Compression	H.264/H.264B/H.264H/MJPEG
Streaming Capability	2 Streams
Resolution	3M(2304×1296)/1080P(1920×1080)/1.3M(1280×960)/720P(1280×720)/720P(1280×720)/ VGA(640×480)/QVGA(320×240)
Frame Rate	3M(1 ~ 20fps)/2M (1 ~ 25/30fps) VGA(1 ~ 25/30fps)
Bit Rate Control	CBR/VBR
Bit Rate	H264:32K ~ 10240Kbps
Day/Night	Auto(ICR) / Color / B/W
BLC Mode	BLC / HLC / DWDR
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Gain Control	Auto/Manual
Noise Reduction	3D DNR
Motion Detection	Off / On (4 Zone, Rectangle)
Electronic Image	Support
Smart IR	Support
Digital Zoom	16x
Flip	0°/90°/180°/270°
Mirror	Off / On
Privacy Masking	Off / On (4 Area, Rectangle)
Audio	
Compression	N/A
Network	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	Wi-Fi(IEEE802.11b/g/n), 50m(open field)
Protocol	HTTP;HTTPS;TCP;ARP;RTSP;RTP;UDP;SMT;FTP;DHCP;DNS;DDNS;IPv4/v6;QoS;UPnP;NTP;Bonjour;Multicast;ICMP;IGMP;
Interoperability	PSIA, CGI
Streaming Method	Unicast / Multicast
Max. User Access	10 Users/20 Users
Edge Storage	NAS(Network Attached Storage),Local PC for instant recording,Micro SD Card(up to 128GB)
Web Viewer	IE, Chrome, Firefox, Safari
Management Software	Smart PSS, DSS,Lechange
Smart Phone	iOS,Android
Interface	
Video Interface	N/A
Audio Interface	N/A
RS485	N/A
Alarm	N/A
Electrical	
Power Supply	DC12V
Power Consumption	<5.5W
Environmental	
Operating Conditions	-10° C ~ +50° C (14° F ~ +122° F) / Less than 95% RH
Storage Conditions	-10° C ~ +50° C (14° F ~ +122° F) / Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	IK10
Construction	
Casing	Metal
Dimensions	Φ109.9mm × 81mm (4.33" × 3.19")
Net Weight	0.34Kg (0.75lb)
Gross Weight	0.47Kg (1.04lb)