


CARATTERISTICHE TECNICHE



Monitor tester con LCD a led da 7" 1280x800, risoluzione 1.080p con audio, tester cavi UTP e telecamere HDCVI, AHD, TVI, CVBS e IP standard ONVIF, H.265/H.264 fino a 4K, supporto controller di rete PTZ (ONVIF), supporto mobile App delle telecamere IP, uscita potenza 12V/2A, uscita PoE DC48V, potenza massima 24W, supporto file video 4K e file MKV/MP4 multimediali, SD Card da 8GB inclusa, fotografia istantanea dello schermo, POE misura di tensione, prova PING, scansione indirizzo IP, 1 ingresso e 1 uscita video HDMI 1080p, autonomia fino a 10 ore

PIXVIDEO

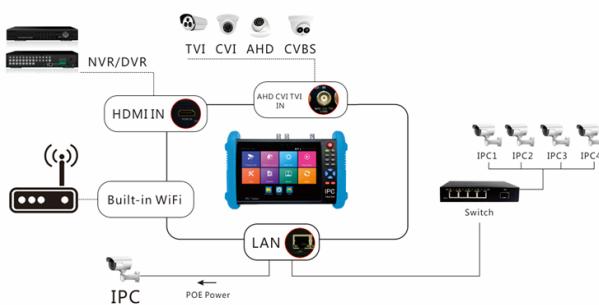

Model	ACE107	
Display	7 inch IPS touch screen , 1280*800 resolution	
CVBS	1 channel BNC input & 1 channel BNC looped output, NTSC/PAL (Auto adapt)	
	PTZ control,RS485 control, Baud 600-115200bps,compatible with more than 30 protocols such as PELCO-D/P, Samsung, Panasonic etc	
	CVBS loop test	the tester send and receive color bar generator signal , check BNC cable
	IP Discovery/Quick ONVIF/IPC test /RTSP play /Client APK	
	Rapid Video	Auto view the video, create testing report
Video Mode	IP camera test 4K/H.265/H.264	Hik test tool activate hikvision camera , modify the user name, password and IP parameters
	Dahua test tool	Dahua camera test, modify the user name, password and IP parameters
	IP& CVBS test	IP& CVBS test at the same time ,converter test from analog to digital with dual test window
	Coaxial HD test *	8MP TVI camera test,3840 x 2160P 15 FPS, UTC control/ call OSD menu * 8MP CVI camera test,3840 x 2160P 12.5/15 FPS,UTC control d call OSD menu * 8MP AHD test, 3840 x 2160P 15fps, UTC control d call OSD menu *
	HDMI input *	1 channel HDMI input, support 1080P *
	Zoom Image	4x zoom, to enlarge image, Screen snapshot, record ,save ,view and record and play back
Analog Video out	Color bar generator	Output one channel PAL/NTSC color bar video signal for testing monitor or video cable
	PoE power output	48V PoE power output, max power 24W
Power output	DC12V power	DC12V /2A power output
Cable test	UTP cable test	Test UTP cable connection status and display on the screen. Read the number on the screen
	RJ45 cable TDR test	Test cable pair status, length, attenuation, reflectivity, impedance, skew etc. measurement range 180M.
TesterPlay	screen projection: tester, mobile phone and PC display at the same time (For android version mobile phone)	
Network test	Trace route, Link monitor , DHCP server, port flashing , Ping test	
Wi-Fi	Built in WiFi,speeds150M,display wireless camera image	
Audio test	1 channel audio signal input, test whether sound normal, 1 channel audio signal, to connect headphone	
Data monitor	Captures and analyzes the command data from controlling device, also can send hexadecimal	
PoE test	Measurement POE switch or PSE power supply voltage and cable connection status	
Drop-down menu	You can select PoE power switch ,IP setting,CVBS, LAN info , HDMI IN functions etc in any interface	
External power supply	DC 12V 2A	
Battery	Built-in 7.4V Lithium polymer battery ,5000mAh	
Rechargeable	After charging 4~5 hours, normal working time 10hours	
Operation setting	OSD menu, select your desired language: English, Chinese, Korean, Russian, Italian, French, Polish, Spanish, Japanese etc	
Auto off	1-30 (mins)	
Working Temperature	-10°C ---+50°C	
Working Humidity	30%-90%	
Dimension / Weight	240mm x 154mm x 46mm / 620g	