




Switch bifilare

Switch BIFILARE per monitor interno VIB073-2, 2 porte LAN 10/100 Mbps, 2 porte BIFILARI per il collegamento in cascata fino a N° 10 VAE064-2. Connessione fino a 20 monitor e 2 posti esterni. Alim. 48Vdc. Necessita di alimentatore VAE025. (131.1x103.0x40.0mm)

PIXVIDEO

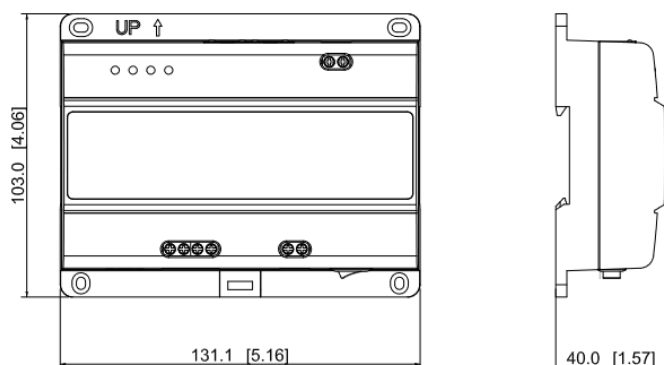

CARATTERISTICHE TECNICHE

Technical Specification

Model	VAE064-2
Basic	
Status Indicator Light	4
Communication Mode	2-wire
Cascade Ability	10
Port	
Port	Two 2-wire ports for cascade
Port	Two RJ45 ports, 10 Mbps/100 Mbps Ethernet
Port	One 2-wire device port
General	
Casing	PC + ABS
Appearance color	White
Power Supply	DC 48V, 1A-3A
Power Adapter	Optional
Installation	Guide rail mount
Certifications	CE; FCC; UL
Accessory	Power converter cable
Product Dimensions	131.1 mm × 103 mm × 40 mm (5.16" × 4.06" × 1.57")
Operating Temperature	-10°C to +55°C (14°F to 131°F)
Operating Humidity	10%-95% (RH, non-condensing)
Operating Altitude	0-3000 m
Power Consumption	≤ 15W (KIT)
Net Weight	0.25 kg (0.55lb)
Gross Weight	0.39 kg (0.86lb)