VEM030D

PIXVIDEO



Modulo display LCD 3”

Modulo display LCD da 3” per postazione esterna modulare (con VEM030A). In alluminio, grado IP65 (con utilizzo di silicato di sodio liquido), antivandalico IK07, temperatura di esercizio -20 ~ +60°. Consumo 1W. (100.0x100.0x28.5mm)

PIXVIDEO

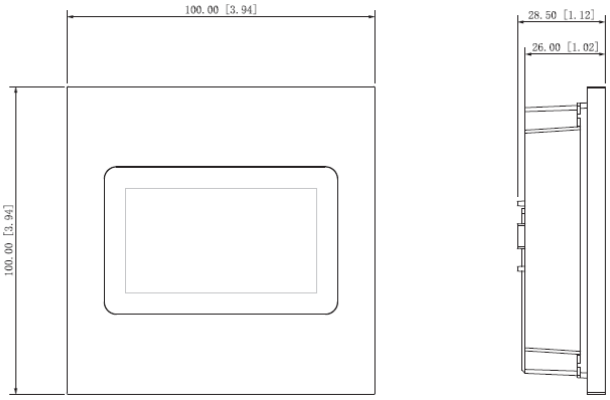

CARATTERISTICHE TECNICHE

Technical Specification	
Model	**VEM030D**
System	
Main Processor	Embedded MCU processor
Capacity	
Card	-
Display	
Display	3.0’’ STN display
Port	
Power Output Port	DC 5V (Provide power for other modules)
Regular	
Power Supply Mode	DC 5V (Provided with power by other modules)
Color	Silver
Dimensions	100 mm × 100 mm × 28.50 mm (3.94'' × 3.94'' × 1.12'')
Protection Grade	IK07; IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended)
Operating Temperature	–20 °C to + 60 °C (–4 °F to + 140 °F)
Operating Humidity	10%–90% (RH)
Power Consumption	1W
Gross Weight	0.17 kg (0.37 lb)

Rev. 180127

Le immagini e le caratteristiche tecniche possono subire variazioni senza preavviso da parte del produttore