


### Monitor int. intercom. IP

Monitor interno intercomunicante IP con altre postazioni interne compatibili, display LCD da 7", risoluzione 1.024x600, 1 porta LAN 10/100Mbps, touch screen capacitivo, 6 ingressi e 1 uscita di allarme, funzioni rubrica, registrazione e storico chiamate, pop up su allarme, slot microSD-Card max 32Gb, installazione da parete o da tavolo con VAM007TAV, alimentazione 12Vdc o Standard PoE (802.3af), consumo massimo 6W. Cornice nera. (119.6x221.5x21.5 mm)

PIXVIDEO

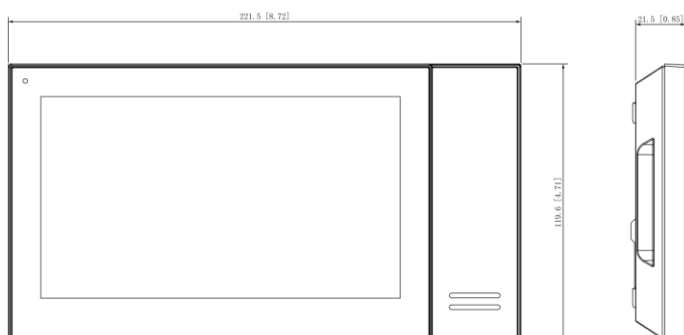

### CARATTERISTICHE TECNICHE

Technical Specification	
Model	VIP076B
<b>General</b>	
Main Processor	High performance embedded processor
Operating System	Embedded LINUX OS
Screen Type	Capacitive screen
Display	7-inch TFT screen
Resolution	1024 × 600
Video Compression	H.264
Audio Compression	G.711A/G.711U/PCM
Audio Input	1 channel all-direction microphone
Audio Output	Built-in 1.5W loudspeaker
Audio Mode	Support dual-way bidirectional talk
Audio Enhancement	Support echo cancellation/DNR
Audio Bit Rate	16 kbps
Communication Mode	Fully digital
Information Release	Support to receive and view notifications issued by center
Leave Videos or Text Messages	Support
DND Mode	Support to set DND period
Sub-station Quantity	9
Alarm Input	6 channels (switch quantity)
Alarm Output	1 channel
Network	1 RJ-45
SOS Alarm	Support
Casing	PC+ABS
Color	Black
Power Supply	Standard PoE DC 12V 1A
Installation	Wall mount
Accessories	Default bracket Default alarm cable
Dimensions	119.6 mm × 221.5 mm × 21.5 mm (4.71" × 8.72" × 0.85")
Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Operating Humidity	10%RH-95%RH
Power Consumption	Standby≤4W, work≤6W
Gross Weight	0.35 Kg (0.77lb)
Power supply mode	PoE
Storage	Support Micro SD, maximum memory capacity 32 G, standard memory capacity 8 G