




## Monitor interno intercomunicante IP

Monitor interno intercomunicante IP con altre postazioni interne compatibili, display LCD da 10", risoluzione 1.024x600, 1 porta LAN 10/100Mbps, touch screen capacitivo, 6 ingressi e 1 uscita di allarme, funzioni rubrica, registrazione e storico chiamate, pop up su allarme, microSD-Card 8 Gb incorporata, montaggio ad applicare su muro o scatola predisposta con piastra in dotazione, integrazione con i sistemi di videosorveglianza Pixvideo, alimentazione 12Vdc o Standard PoE (802.3af), consumo massimo 7W. Cornice nera. (260.0 x 170.0 x 28.0mm)

PIXVIDEO

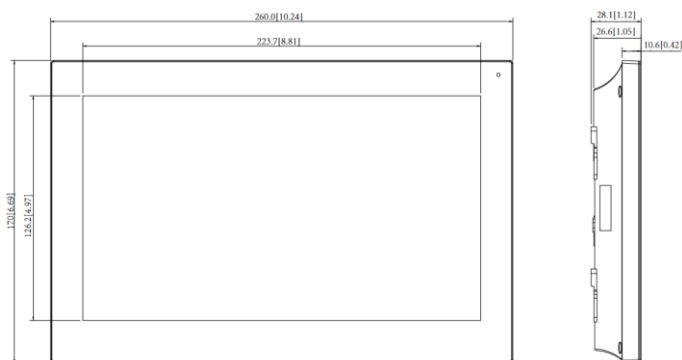

## CARATTERISTICHE TECNICHE

### Technical Specification

Model	VIP078
<b>System Parameter</b>	
Operating System	Embedded LINUX operating system
Network Protocol	IPv4, FTP, RTSP, RTP, TCP, UDP, SIP
Keyboard Type	Touch keyboard (0-9, *, #)
<b>Basic Parameter</b>	
Screen Type	Capactive screen
Display	10-inch TFT LCD
Resolution	1024 (H) × 600 (V)
Video Compression	H.264
Audio Compression	G.711a, G.711Mu, G.711u, PCM
Audio Input	1 channel all-direction microphone
Audio Output	1 channel
Audio Mode	Support dual-way bidirectional talk
Audio Enhancement	Support echo suppression/DNR
<b>Function Parameter</b>	
Communication Mode	Fully digital
Leave Videos or Text Messages	Support
DND Mode	Support
Sub-station Quantity	9
Edge Storage	Embedded 8 GB
<b>Port</b>	
Alarm Input	6 channels
Alarm Output	1 channel
Doorbell	Supported by every channel
Network	1 RJ-45, 10 M/100 Mbps self-adaptive
<b>Alarm Parameter</b>	
SOS Alarm	Support
<b>General Parameter</b>	
Casing	PC+ABS
Appearance Color	Black
Power Supply	Standard PoE DC 12V 1A
Power	Optional
Installation	Surface
Certifications	CE/FCC
Dimensions	260 mm × 170 mm × 28 mm (10.24" × 6.69" × 1.10")
Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Operating Humidity	10%RH-90%RH (No condensation)
Power Consumption	≤7W (Work)