

PIX-VIP080E

Monitor Ibrido da Interno a 2 Fili



Specifiche Tecniche

System

Main Processor	Embedded Processor
Operating System	Embedded Linux operating system
Button Type	Touch button

Basic

Screen Type	Non-touchscreen
Display Screen	4.3" TFT
Screen Resolution	480 (H) × 272 (V)
Audio Input	1 channel
Audio Output	Built-in speaker
Audio Mode	Two-way audio (half-duplex)

Function

Communication Mode	Analog
Leave Videos	Yes (SD card inserted in VTH is needed)
DND Mode	Do not disturb mode can be set
Number of Extensions	2
Storage	Supports Micro SD card storage, up to 64 GB

Performance

Casing Material	ABS
-----------------	-----

- Interfaccia utente ad alta definizione.
- Supporta la comunicazione a 2 fili.
- Dispone di modalità standby e funzione di riattivazione rapida.
- È possibile lasciare messaggi audio e video per le chiamate senza risposta e scattare istantanee (è necessaria una scheda SD).
- Supporta la configurazione del monitor interno principale e secondario e la ricezione di chiamate di gruppo dalla stazione esterna.
- Permette l'anteprima e lo sblocco con un solo clic.




General

Appearance Color	White
Power Supply	The power is provided by the distributor.
Installation	Surface Mount
Certifications	CE
Accessory	Includes: Power cord and bracket
Product Dimensions	136 mm × 140 mm × 25.5 mm (5.35" × 5.51" × 1.00")
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	10%–95% (RH)
Operating Altitude	0 m–3000 m (0 ft–9842.52 ft)
Power Consumption	≤1 W (standby), ≤5.5 W (working)
Gross Weight	402.5 g (0.89 lb)
Storage Temperature	0 °C to +40 °C (+32 °F to +104 °F)
Storage Humidity	30%–75%
Operating Environment	Indoor


Ordering Information

Type	Model	Description
VTH	DHI-VTH1013J	2-wire Analog Indoor Monitor

Installazione

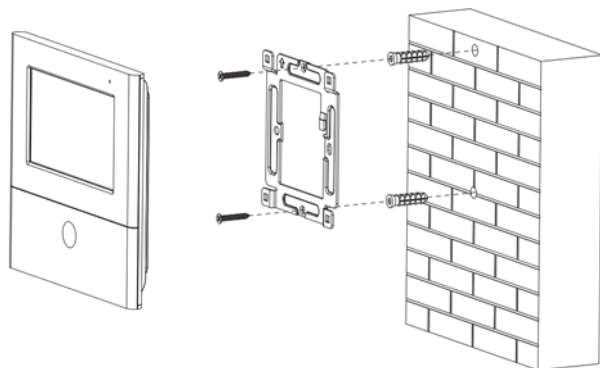

Dimensioni (mm[inch])

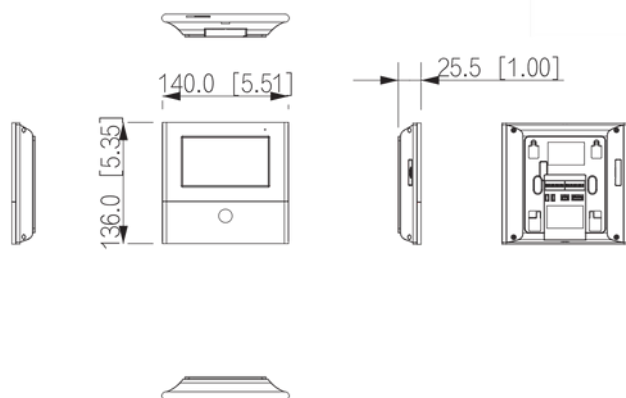

Applicazione

